



PLUG IN RADIANT HEATERS

- All heaters have Quartz Tube elements and 3 prong cord set.
- Six models, at two voltages, provide a wide range of heating capacities from 500 to 5700 watts (1711 to 19,488 BTU/HR).
- Apply heat only where needed. Convenient ceiling chain mounting and cord set allows custom heating of only the areas being used. No need to waste energy heating the entire room or building.

APPLICATIONS


Designed for supplemental indoor heating in residential and commercial areas; Laundry rooms, Work shops, Toll booths, Garages, Assembly areas, Loading and Shipping docks, and Well houses.



For residential and light commercial applications with gold anodized aluminum enclosure and reflector.

CATALOG NO.	VOLTS	WATTS	REFLECTIVE ANGLE	DIMENSIONS			SHIP WT. lbs. (Kg)
				HEIGHT in. (mm)	WIDTH in. (mm)	LENGTH in. (mm)	
CHRR10512	120	500	60 Sym	4.65	5.75	16.75	2(0.9)
CHRR11012	120	1000/500					


CHRR11012 has switches for 500 or 1000 watt operation.

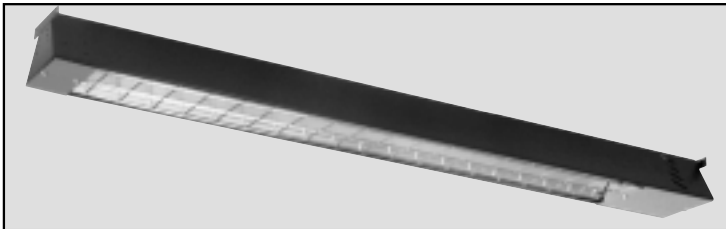

For commercial and industrial applications with Statuary Bronze painted steel enclosure and gold anodized reflector.

CATALOG NO.	VOLTS	WATTS	REFLECTIVE ANGLE	DIMENSIONS			SHIP WT. lbs. (Kg)
				HEIGHT in. (mm)	WIDTH in. (mm)	LENGTH in. (mm)	
CHRR41512	120	1500	60 Sym	3.375 (86)	5.5 (140)	46 (1168)	9 (4.1)
CHRR53024	240	3000				57 (1448)	11 (5.0)

The versatility of these heaters is doubled... They can be mounted on the ceiling or they can be mounted on the optional cart and rolled to any location for maximum spot heating effect. Both heaters have switches for full or 50% operation.

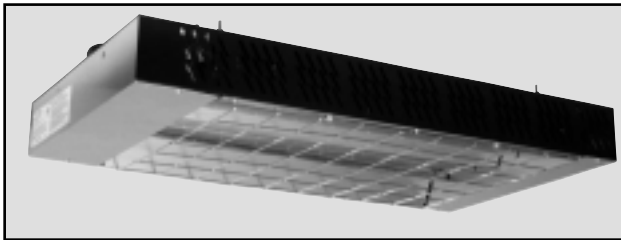

For commercial and industrial applications with Statuary Bronze powder coated steel enclosure and gold anodized reflector:

CATALOG NO.	VOLTS	WATTS	REFLECTIVE ANGLE	DIMENSIONS			SHIP WT. lbs. (Kg)
				HEIGHT in. (mm)	WIDTH in. (mm)	LENGTH in. (mm)	
CHRR22012	120	2000/1000	60 Sym	3.75 (95)	11 (280)	25 (637)	12 (5.5)
CHRR35724	240	5700/2850		19 (484)	34 (866)	22 (10)	